

# Blueiot

## BA3000-t

### Product Overview

BA3000-t is an indoor AOA high-precision positioning product launched by Blueiot for industrial and commercial scenarios. It has centimeter-level positioning capability and meets the core requirements of real-time accurate positioning and tracking, intelligent scheduling, safety control, and process management for personnel, vehicles, and materials in positioning scenarios.

BA3000-t indoor positioning anchor is equipped with Blueiot self-developed hardware platform, integrating multipath suppression algorithm and intelligent environment adaptation technology, providing customers with centimeter-level real-time positioning, multi-dimensional data visualization and intelligent boundary-crossing alarm. Its low power consumption, master-slave anchors' wireless connection design enable it to become the ideal choice for intelligent medical, intelligent manufacturing, warehousing and logistics and other high-precision positioning needs of the industry.

### Product Outfit



# Product Features

## 1. High-precision Positioning

- a. Blueiot AOA high-precision positioning algorithm
- b. Positioning accuracy of 10cm level
- c. Coverage of more than 25m
- d. Fearless of interference, stable trajectory


## 2. Convenient Construction

- a. Daisy-chained dual network port serial link, support for PoE/DC power supply
- b. Supports ceiling and sidewall mounting, flexible location, convenient construction
- c. Total dimensions 220mm × 220mm × 32mm, net weight 680g, lightweight and space-saving

## 3. Strong Compatibility

- a. Compatible with iOS/Android/HarmonyOS system
- b. Supports APP/mini program, strong application extensibility
- c. Compatible with BLE4.0 and above devices

# Technical Specifications

| Hardware Specifications |                                                                                                           |
|-------------------------|-----------------------------------------------------------------------------------------------------------|
| Dimensions              | 220mm × 220mm × 32mm  |
| Weight                  | 680g                                                                                                      |
| Installation            | Ceiling/Side wall mounting, with a maximum installation height of 10m                                     |
| Network Interface       | RJ45                                                                                                      |
| Interface Format        | Daisy-chained one in one out, dual network port serial link                                               |
| Power Supply            | IEEE 802.3af PoE 48V                                                                                      |
| Rated Power             | 3W                                                                                                        |
| Positioning Diameter    | ≥25m                                                                                                      |


|                              |                                                                                |
|------------------------------|--------------------------------------------------------------------------------|
| Compatibility                | Compatibility with BLE4.0 and above devices above devices                      |
| <b>AOA Specifications</b>    |                                                                                |
| Antenna Type                 | Built-in omnidirectional antenna                                               |
| Radio Frequency Band         | 2.4GHz ~ 2.4835GHz                                                             |
| Positioning Accuracy         | 10cm level*1                                                                   |
| Data Protocol                | Blueiot AOA protocol                                                           |
| Features                     | Supporting Bluetooth IOT data transmission, reporting tag information and data |
| <b>Operating Environment</b> |                                                                                |
| Protection Grade             | IP65                                                                           |
| Operating Temperature        | -40°C ~ 80°C                                                                   |
| Storage Temperature          | -40°C ~ 85°C                                                                   |
| Operating Humidity           | 10% ~ 90% non-condensing                                                       |
| Storage Humidity             | 5% ~ 95% non-condensing                                                        |
| <b>Certifications</b>        |                                                                                |
| Certifications               | CE, FCC, RoHS, TELEC                                                           |

**Note:**

\*1: Under open and interference-free conditions (e.g. no obstruction, no reflection, stable signal), the accuracy can reach 10cm.

# Application Topology

The tag sends Bluetooth AOA data, the anchor receives the data and analyzes it, then sends it to the solving server through the network for location solving. And accurate positioning information will be presented on the terminal.

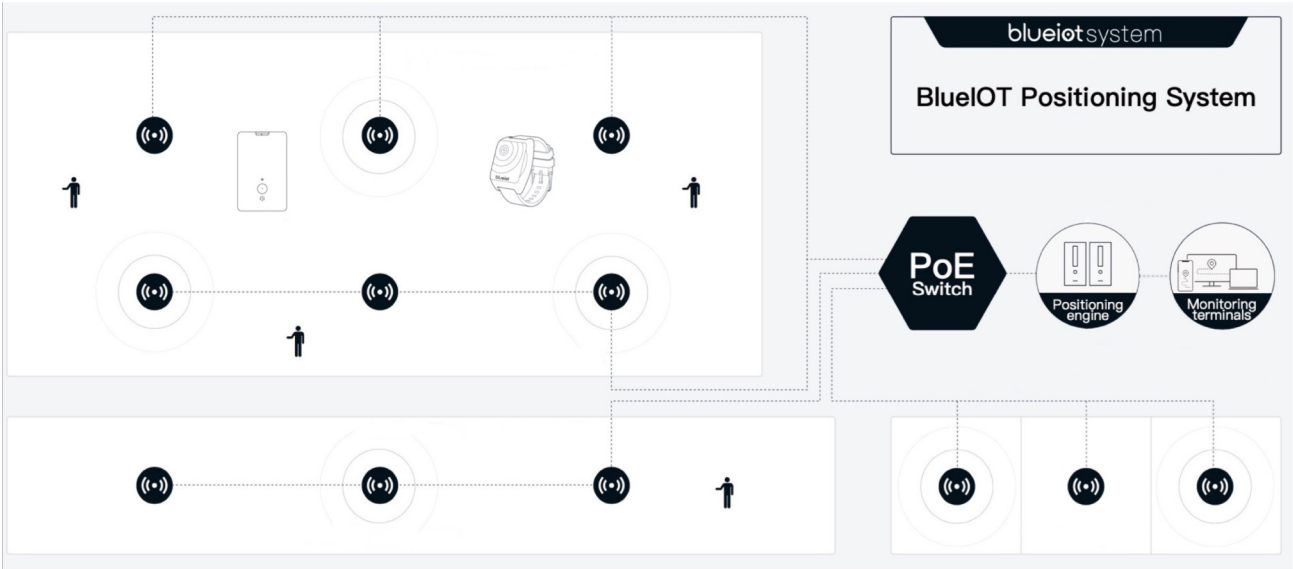

# Positioning-based Applications

## Visualized Management Screen

It can display the real-time location of all tags on a 2D map, a tilted photographic map, or a 3D model map, which provides managers with an overall view. Through supervision of the large screen, managers can track the real-time understanding of the position of a person or object. Moreover, when an alarm is triggered, visual positioning facilitates immediate understanding of the incident and its status.



## Geofencing

The system supports flexible drawing of geofences, providing multi-mode alarm functions such as in/out fence alarm, SOS alarm, tamper alarm, disappearance alarm, regional overcrowding/staying alarm, etc., and supports dual alarms both on the tag system and monitoring



## Trajectory Retracing and Analysis

Supports tracing backpast tag positioning data, displaying it in trajectory diagram, and associating it with alarms and monitoring videos occurring in the track. Supports multi-speed playback, one-touch full trajectory display and other functions to achieve efficient and accurate tracking and analysis.



For more positioning applications, such as navigation and positioning in transportation hubs, collection of physical signs in hospital wards, tracking of special patients, etc., please contact Blueiotfor more information about the industry solutions.

## More Information

If you want to get more related information, please don't hesitate to click our website:

<https://www.blueiot.com>

Or you can contact us through:

Official customer service hotline: 010-82170550    Enterprise user service mail: [global@blueiot.com](mailto:global@blueiot.com)

---

Copyright © 2025 Blueiot (Beijing) Technology CO.,Ltd. All rights reserved.

### Trademark Declaration

Blueiot and other related trademarks, all trademarks or registered trademarks mentioned in this document are owned by their respective owners.

### Notice

Your purchase of products, services or features shall be subject to the terms and conditions of the commercial contract with Blueiot, and all or part of the products, services or features described in this document may be excluded from the scope of your purchase or use. Unless otherwise agreed, no statements or warranties, explicit or implicit, are provided for this document.

Due to product version upgrades or other reasons, the contents of this document will be updated from time to time. Unless otherwise agreed, this document is intended only as a guide to the use of this document, all statements, information and suggestions in this document do not constitute any express or implied warranties.

### Blueiot (Beijing) Technology Co., Ltd.

Address: 10th Floor, Building A, Innovation Plaza, No.1 Zhongguancun East Road, Haidian District, Beijing

Postcode: 100086

Website: <https://www.blueiot.com>